


Enfriador refrigerado vertical ERC 36



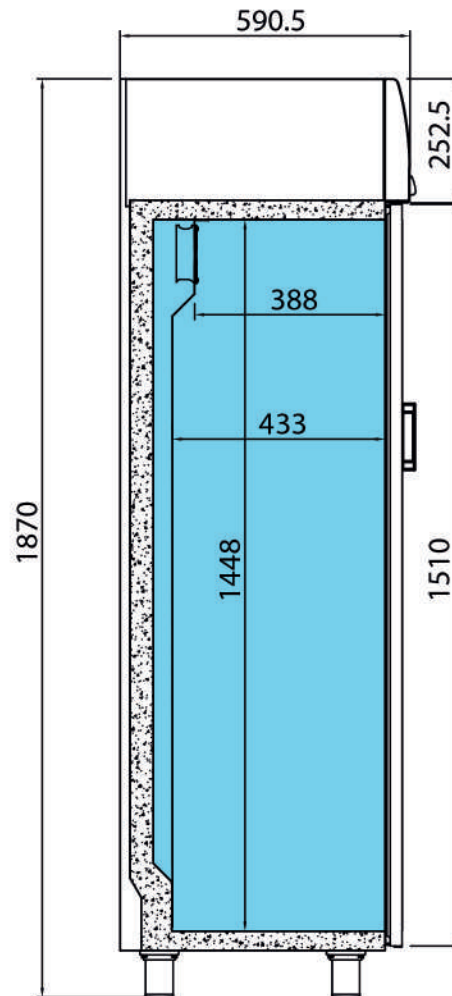

Enfriador refrigerado vertical ERC 36

EXTERIOR

- Acero plastificado blanco
- Cabeza iluminativa (ERC 17/36)

INTERIOR

- Acero plastificado blanco
- Iluminación LED interior
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables

AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m³, bajo GWP y cero efecto ODP

PUERTAS

- Puertas con doble acristalamiento (6-10-4)
- Burlate fácilmente sustituible
- Puertas con tirador integrado

REFRIGERACIÓN

- Sistema de condensación ventilada
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa en acero inoxidable
- Control temperatura final del desescarche

OPCIONAL / OPTIONAL

- Parrillas / Wire shelves ERC 17/36 (502X27)

EXTERIOR

- White plastic coated steel
- Illuminated head (ERC 17/36)

INTERIOR

- White plastic coated steel
- LED interior lighting
- Plastic coated wire shelves, adjustable height and easy removal

INSULATION

- Free CFC's high density (40kg/m³) polyurethane insulation with low GWP & zero ODP effect

DOORS

- Doors with double glass. (6-10-4)
- Easy removal gasket
- Integrated handle doors

REFRIGERATION

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Stainless steel evaporative tray
- Control of the final defrost temperatura

| MODELOS MODELS | | | | | | | | | | | | | |
|-------------------|---|--------------------------|--|------------------------------|---------------------|---|---------------------------------|---|----------------------------|--|-------------------------|--------------------|-------------------------|
| | Dimensiones Dimensions LxAnxAl (mm) | Potencia Power (W) | Tensión/Frecuencia Electrical (V/Hz) | Capacidad Capacity (L) | Nº puertas Doors | Nº parrillas / guías No shelves / Slides | Compresor Compressor (µF) | Potencia Frig. Cooling capacity (W) (T ^{amb} -10°C) | Evaporación Evaporation | Régimen temperatura Temperature range (32°C) | Desescarche Defrost | Control Control | Refrigerante Coolant |
| ERC 36 | 620x595x1870 | 575 | 220/50 | 355 | 1 | 4 | 1/4 | 577 | Forzada Forced | +4°C/+8°C | Automático Automatic | Digital | R 404 A |