




# TECNOFRIAS, S.L.



## Expositor refrigerado ERV 35 PP

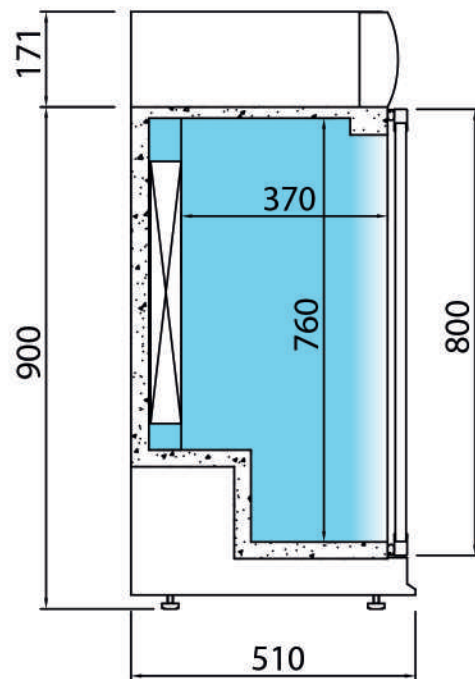



## Expositor refrigerado ERV 35 PP

### EXTERIOR

- Acero plastificado negro

### INTERIOR

- Acero plastificado gris
- Iluminación interior
- Parrillas de alambre de acero plastificado, regulables en altura y fácilmente desmontables

### AISLAMIENTO

- Poliuretano inyectado alta presión libre de CFC's densidad 40 kg/m<sup>3</sup>, bajo GWP y cero efecto ODP

### PUERTAS

- Puertas con doble acristalamiento (6-10-4)
- Cerradura incorporada
- Burlete fácilmente sustituible
- Puertas con tirador integrado

### REFRIGERACIÓN

- Sistema de condensación ventilada
- Evaporadores tratados anticorrosión 100% Poliéster
- Bandeja evaporativa

### OPCIONAL / OPTIONAL

- Iluminación LED / LED lighting

### EXTERIOR

- Black plastic coated steel

### INTERIOR

- Grey plastic coated steel
- Interior lighting
- Plastic coated wire shelves, adjustable height and easy removal

### INSULATION

- Free CFC's high density (40kg/m<sup>3</sup>) polyurethane insulation with low GWP & zero ODP effect

### DOORS

- Doors with double glass. (6-10-4)
- Integrated lock
- Easy removal gasket
- Integrated handle doors

### REFRIGERATION

- Forced air refrigeration system
- Evaporator coil coated with anti-corrosion material 100% Polyester
- Evaporative tray

MODELOS MODELS	→	↗	↑	⏻	⚠	📦	📱	📊	🔧	❄	💧	🌡	🔌	📺	📶	🌡
	Dimensiones Dimensions LxPxH (mm)	Potencia Power (W)	Tensión/Frecuencia Electrical (V/Hz)	Capacidad Capacity (L)	Nº puertas Doors	Nº parrillas/guías No shelves / Slides	Compresor Compressor (HP)	Potencia Frig. Cooling capacity (W) (T <sub>amb</sub> -T <sub>0</sub> °C)	Evaporación Evaporation	Régimen temperatura Temperature range (32°C)	Desescarche Defrost	Control Control	Refrigerante Coolant			
ERV 35 PP	1350x510x920	425	220/50	330	3	2	1/4	298	Forzada Forced	+4°C/+12°C	Automático Automatic	Digital	R 134 a			